

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number  
**WO 2005/093292 A1**

(51) International Patent Classification<sup>7</sup>: **F16H 21/48**

(21) International Application Number:  
PCT/HU2005/000031

(22) International Filing Date: 24 March 2005 (24.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
U 0400076 25 March 2004 (25.03.2004) HU

(71) Applicant and

(72) Inventor: NÁDAS, Béla [HU/HU]; Budai Nagy Antal u.  
6., H-1137 Budapest (HU).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,

KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DRIVING MECHANISM

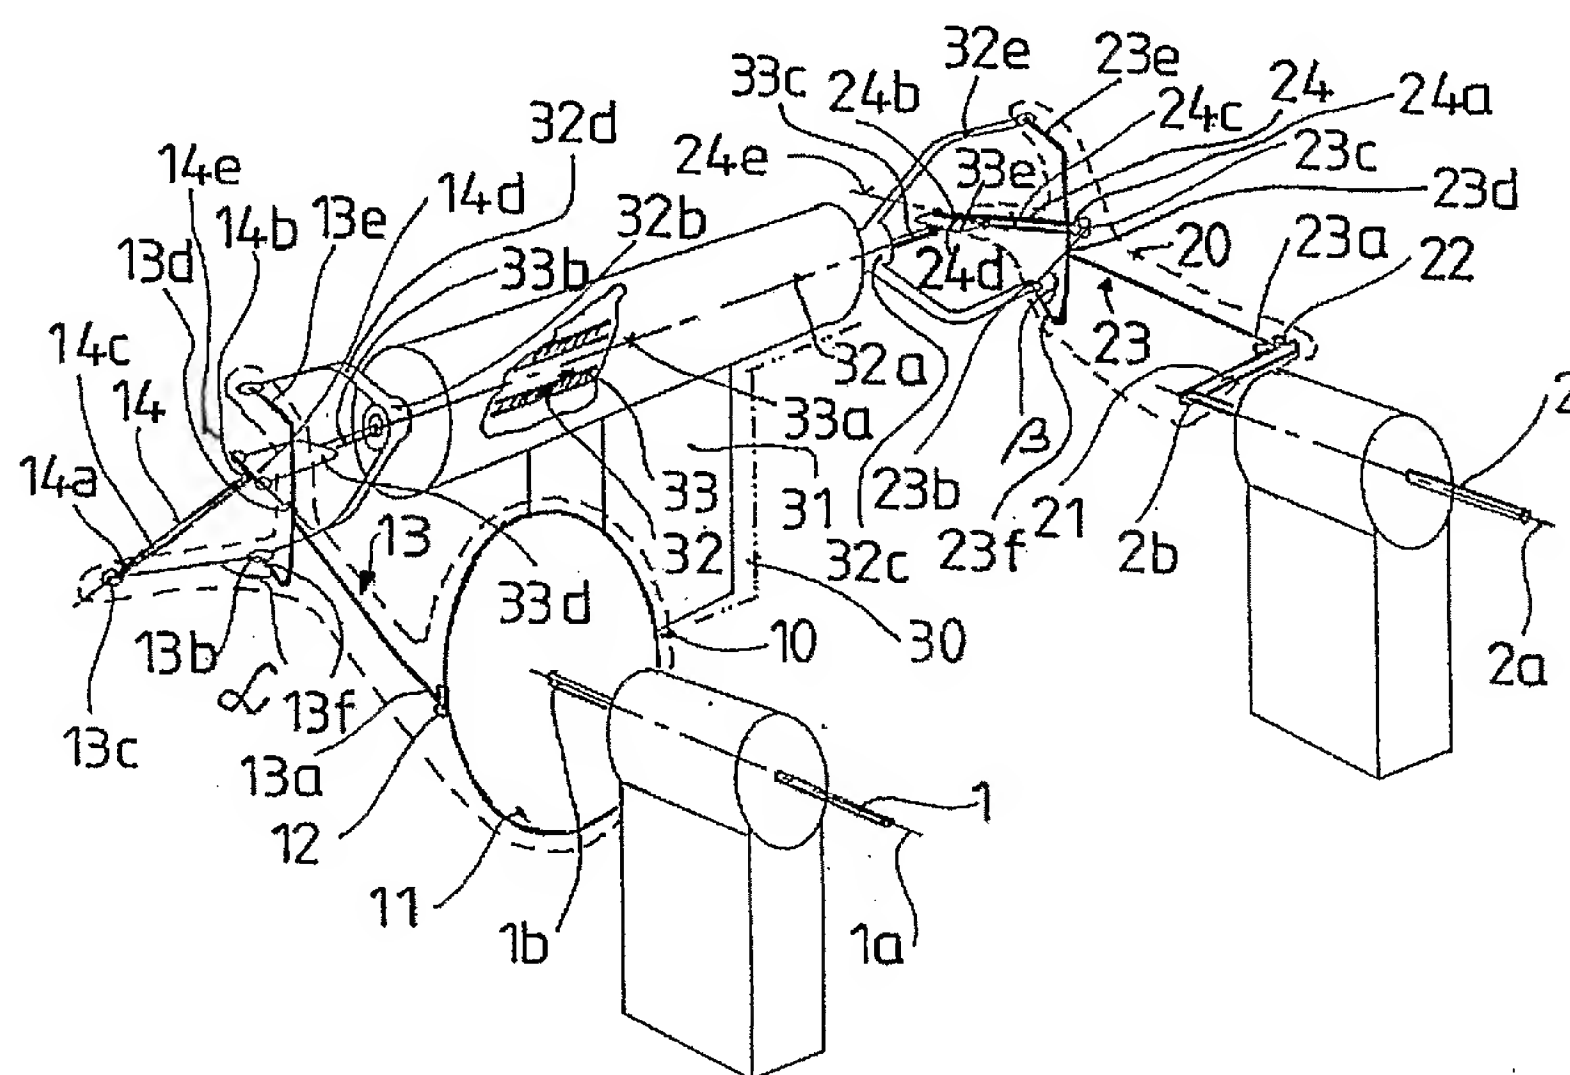

(57) Abstract: The coupling gear (30) has a first torque transfer shaft (32) and a second torque transfer shaft (33) embedded in a house (31) in a rotating way, the input end (32b) of the first torque transfer shaft (32) is connected to the intermediate connecting piece (13b) of the first motion transfer unit (13) of the first connecting part-unit (10), and its output end (32c) is connected to the intermediate connecting piece (23b) of the first motion transfer unit (23) of the second connecting part-unit (20) while the input end (33b) of the second torque transfer shaft (33) is connected to the motion piece (14) of the first motion transfer unit (13) of the first connecting part-unit (10), and its output end (32c) is connected to the motion piece (14) of the first motion transfer unit (23) of the second connecting part-unit (20).

WO 2005/093292 A1